

**SHUTTERCRAFT, INC.**  
**15 Orchard Park**  
**Madison, CT 06443**  
**Visit our Showroom!**




**Phone (203) 245-2608**  
**Fax (203) 245-5969**  
**Email [all@shuttercraft.com](mailto:all@shuttercraft.com)**  
**Website [www.shuttercraft.com](http://www.shuttercraft.com)**

Matching Your Existing Exterior Shutters - Determine Your Basic Shutter Type




Measure the width and height of each shutter. It's best to replace shutters in "pairs" to insure they match "each other" on each window. If you have several single shutters in good shape, group them on same size windows where possible.

Measure the components of your existing shutter.

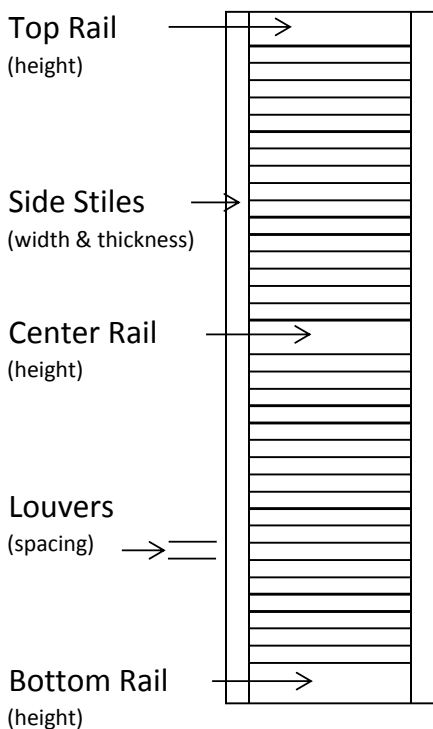

If shutter is louvered, count the number of louvers in each section of the shutter... upper and lower sections.

Measure the distance from the bottom of the shutter to the bottom of the Center Rail. If there are more than two sections, count the louvers and measure to the bottom of each cross rail.

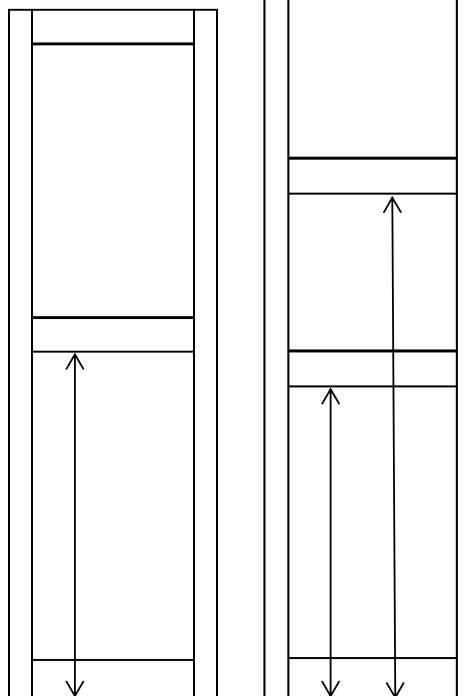



This diagram represents our construction and typical frame components of an exterior shutter, which is most often filled with fixed louvers, moveable louvers, raised panels, flat panels, v-groove or a combination.

Diagram Codes

SST.....Side Stile Thickness

SSW.....Side Stile Width

TR1.....Top Rail Height


TR2.....Top Rail Thickness

CR1.....Center Rail Height

CR2.....Center Rail Thickness

BR1.....Bottom Rail Height

BR2.....Bottom Rail Thickness

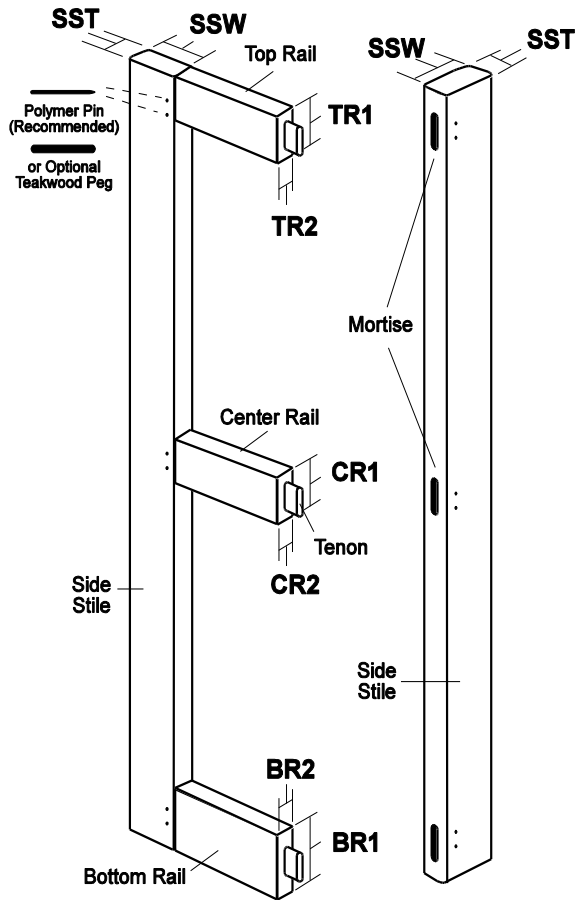

Mortise & Tenon Frame Construction



Raised panel over fixed louvers with molding, horns, and custom cutouts



Fixed Louvers with surface molding and false tilt rods



Flat panel over fixed louvers with tilts, mouse hole, and custom trees

Here are some examples of shutters matched from existing shutters for replacement by Shuttercraft